


Conforms to
Part L
of Building Regulations

0.2 U-value for conservatory roofs is now a reality



The revolutionary eco i-panel, is a insulated composite panel, suitable for conservatory roofing and walls, that offers incredible U-values as low as 0.20 & conforms to Part L of Building Regulations, removing the necessity for dividing internal doors between the house and conservatory

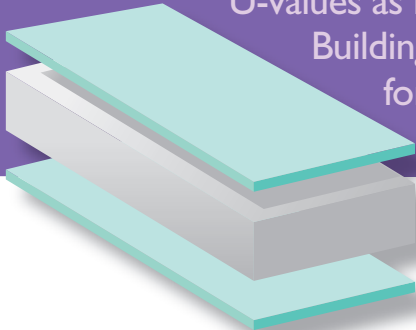


eco i-panel

Insulated Conservatory Panels

eco-i-panel

Product Specification

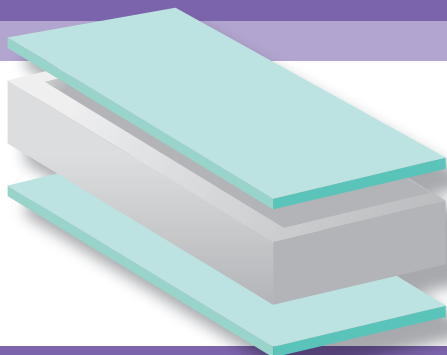

eco-i panel is the first thermally efficient system available in the UK that is suitable for both insulated conservatory roofs, walls and curtain walling applications.

Available now, only from 

MATERIAL	TECHNICAL DATA	
	25mm Panel	35mm Panel
Weight Per m ²	22kg	25kg
U-Value	1.2 w/m ² k	0.2 w/m ² k
External/Internal toughened screen printed glass	BS EN12600:2002	
Thermal insulation panels (17mm & 25mm)	Din 4102-A2 non flammable	
Internal 3mm laminate board	Approved document B of building regulations 2000	
Thickness tolerances	+/- 2mm	
Acoustic Value	34db	




Available in a range of standard colours:

Internal Laminate Board


-  0160 Rose Wood
-  0161 Light Oak
-  0085 White
-  0073 Hygenic White

All colours based on standard RAL Colours

Screen Printed Glass: External or internal

-  6014 Yellow Olive
-  7015 Slate Grey
-  8004 Copper Brown
-  6019 Pastel Green
-  7006 Beige Grey

Choose from 25 or 35mm thickness panels:



Screen printed glass external face -
Screen printed glass internal face

Screen printed glass external face -
Laminate board internal face

Call now for further information: **Tel: 0151 257 2777 Fax: 0151 257 2772**
www.tuffxprocessedglass.co.uk



Insulated Conservatory Panels